

Rotonda shower pod

TÜV certified

Measurements:

Diameter 100 cm, height 225 cm
(min height requirement 235 cm)

Material:

Stainless steel, uprights brushed
Floor polished non-slip steel sheet with in-built trap
Sliding door 60 cm wide, runs on plastic rollers

Fittings

Franke - Presto auto-close
ARWA Classic
or other double hole mixers with a 152 mm distance.
Integrated soap/shampoo dish
Height of shower head adjustable on sliding pole.



Connections to be prepared behind the unit:


1. Hot water supply in 1/2" (21.3mm) pipe terminated with tap/valve with a 3/4" (26.9mm) outside thread.
2. Cold water supply in 1/2" (21.3mm) pipe terminated with tap/valve with a 3/4" (26.9mm) outside thread.

Note: To guarantee a good hot/cold mix, the pressure difference between hot and cold water supply should not exceed 1 bar.

3. The connection is made with a reinforced hose.
4. Drain connection with a diameter of 50mm in plastic or CrNiFe, max. 12 cm above finished floor.

Serial potential equalisation 16² must be prepared.

Prior to shower pod installation, supply pipes need to be jet washed and sealed off.

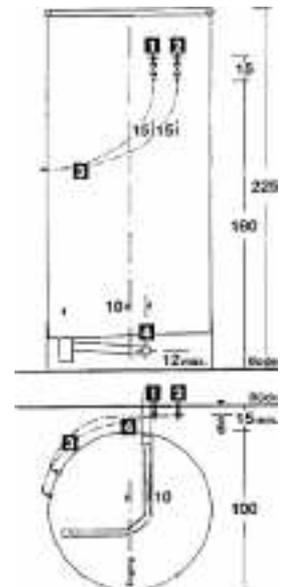

Heinrich Haug AG

Wagistrasse 7 CH-8952 Schlieren, Switzerland
Tel. +41 (0)44 341 16 59 Fax +41 (0)44 341 16 46
E-Mail: info@duschen-haug.ch www.duschen-haug.ch

Options for serial configurations



Individual connections per unit as described above

Prepared serial connection in insulated stainless steel trunking

Requires only one drain connection (DN75)
Ventilated as an option (DIN EN 12056)
and
only one hot and cold water supply
with tap/valve with a 1" (33.7mm) inside thread.

Serial potential equalisation 16² is prepared

A distance of 45 cm from the wall allows
easy access to taps, for maintenance
and for cleaning.



Heinrich Haug AG
Wagistrasse 7 CH-8952 Schlieren, Switzerland
Tel. +41 (0)44 341 16 59 Fax +41 (0)44 341 16 46
E-Mail: info@duschen-haug.ch www.duschen-haug.ch